

EUP12A-1H12V-1 (Product No.:103200002101)

Summary

EUP12A-1H12V-1 is a constant voltage mode output LED driver. This driver can be controlled by external signal (0/1-10V active signal, adjustable resistance and PWM signal) to achieve a smooth dimming effect.

Product Features

- Single channel constant voltage output, 1A Max
- Support 3-in-1 dimming mode (0/1-10V active signal, adjustable resistance and PWM signal)
- Dimming range of 0-100%, and dimming effect smooth, no flicker
- 100% output when no dimming signal input, can be used as normal power supply
- Over load protection; Over temperature protection; Short circuit protection
- IP20, suitable for MR16 and other indoor LED lighting application



Application



Downlight



Panel Light



Spotlight



Ceiling Light



Decorative Light



Floor Light





Flood Light




Technical Parameters

Model	EUP12A-1H12V-1	
Input	Efficiency	80%@230VAC, Full load
	Voltage	220VAC-240VAC
	Frequency Range(Hz)	50/60Hz
	Power Factor	≥0.5@230VAC, Full load
	AC Current(max)	0.15Amax@230VAC
	Inrush Current(max)	Cold start, 12A@230VAC
Output	Current(mA)/Voltage (VDC) Power(W)	1A/12VDC/12W
	R & N (Max)	120mVp-p
	Channel	1
	Voltage Accuracy	±3%
Function	Dimming Type	0/1-10V active signal, adjustable resistance, PWM
	Dimming Range	0.1%-100% Dimming to off
Protection	Over voltage	Close output, recovers automatically after fault removed
	Over load	Close output, recovers automatically after fault removed
	Over temperature	Shut down the output, recovers automatically when temp. back to normal.
Others	Working Temp.	-20°C-50°C
	Storage Temp., Humidity	-40°C-85°C, 20-90%RH
	tc	90°C
	Material	PC
	IP Rating	IP20
	Lifetime	30,000h@tc:80°C
	Warranty Condition	3 years
	Switch Cycle	>15,000 times
	Packing(weight)	Net weight: 85g±5%/PCS; 100PCS/Cartron; 9.2kg±5%/Cartron; Carton Size: 338*254*219mm(L*W*H)
	Dimension	78*36*29mm (L*W*H)


Dimension(mm)

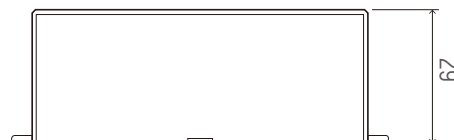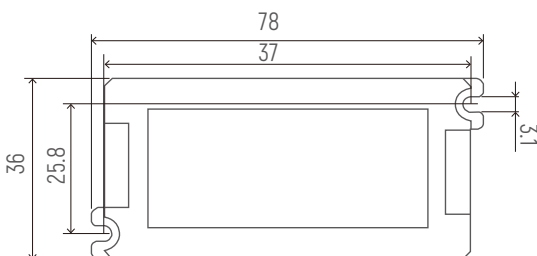

0/1-10V Wiring

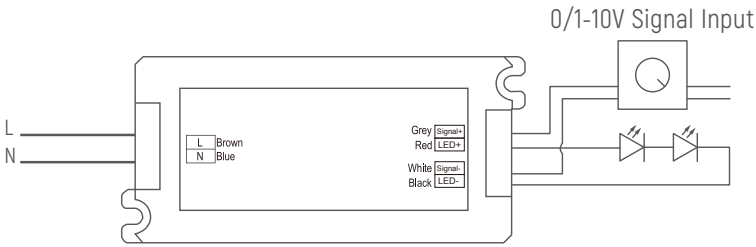

Dimming Curve

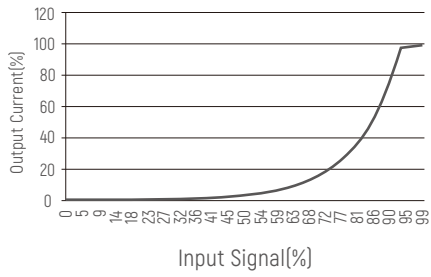

Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 2.5mm² is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .